

LRF126 Laser Rangefinder Module

Noptel

The compact, eye safe and highly integrated LRF rangefinder module is utilized in various applications from versatile systems to handheld devices.

The module is delivered without enclosure enabling OEM-users to embed the module into their own system or device.




Features

- Ultra compact and lightweight
- Pulsed time-of-flight measurement
- Low power consumption
- Ranging capability up to 4500 m
- Diode laser 1.5 μm wavelength
- Eye safe Class 1

Applications

- Reconnaissance
- Observation & surveillance
- Border and port control
- Off-shore rescue
- Drone & UAV gimbals
- Handheld devices
- Sights

Performance as a function of visibility

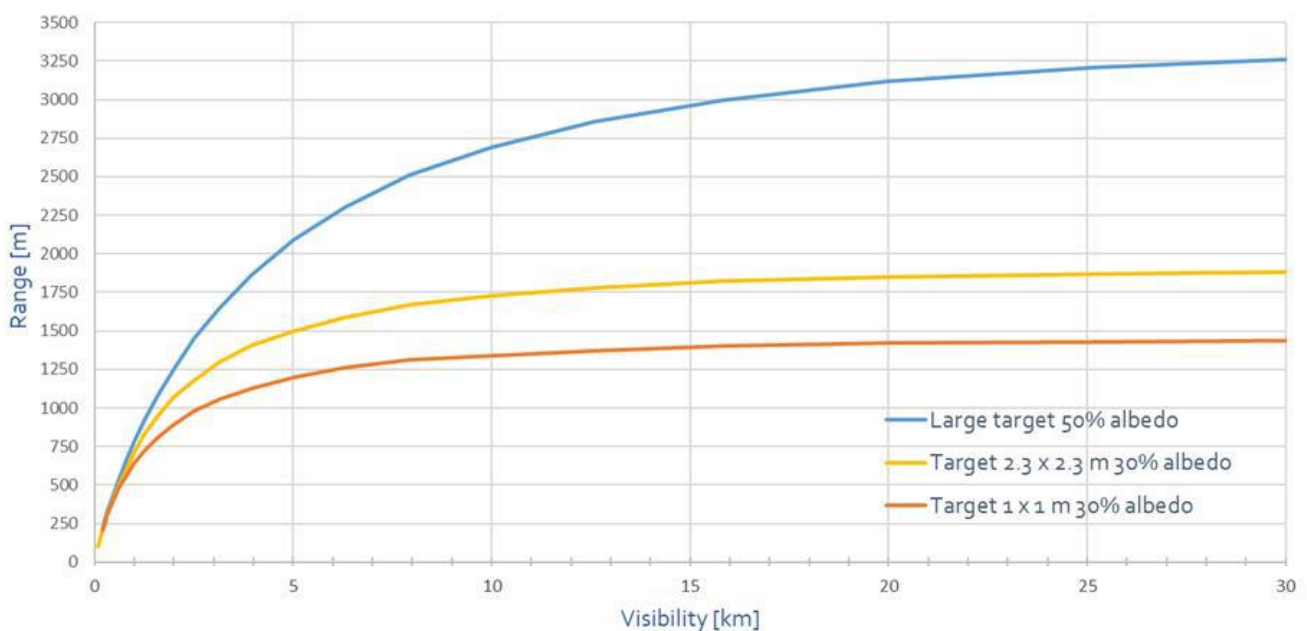

Noptel LRF126 Laser Rangefinder Module



Technical specifications

Performance Characteristics	Unit	LRF126	Note
Laser safety class	-	1	Eye safe
Wavelength	µm	1.5	
Ranging capability	m	0 - 4500	Range selectable by gating feature
Performance to standard NATO target (SMM) (CMM 10Hz)	m	1850 1200	Target size 2.3 x 2.3 m, visibility 25 km, target reflectivity 30%, detection probability 90%
Measuring time in Single Measurement Mode (SMM)	s	1.3	Full performance
Continuous Measurement Mode (CMM) rates	Hz	1, 4, 10, 20, 100, 200, 500	Range performance depends on applied rate
Precision	m	0.01 - 0.5	Depending on distance and target reflectivity
Beam divergence (HxV)	mrad	0.5 x 2.5	(HxV) = Horizontal x Vertical
False detection rate	%	< 1	
Target discrimination	m	< 20	Depending on the received signal level. Up to three (3) targets: First, Second and Last.
Range gating resolution	m	1	
Operating temperature	°C	-32 - +65	
Storage temperature	°C	-46 - +71	
Mechanical characteristics	Unit	LRF126	Note
Size (L/W/H)	mm	48 x 34 x 20	
Weight	g	34	
Alignment retention	mrad	± 0.4	Within operating temperature range
Alignment pointer	nm	N/A	
IP Protection	-	N/A	
Electrical characteristics	Unit	LRF126	Note
Serial interface	-	UART 3.3 V	Connector type: Molex 53261-0871 Firmware update via serial interface
Start-up time	s	< 0.3	Measurement readiness from power-up
Supply voltage	V	3.3 – 5.4	Voltage at the supply input of the LRF
Power consumption	W	< 1.8	
Power consumption in stand-by mode	W	< 0.2	Unit can be completely shut down by external signal to further minimize power consumption

Specifications are subject to change without notice. Doc.: M43926GE